

## HDMI Encoder/Decoder

# NJR-P01UC-T/NJR-P01UC-R

The NJR-P01UC is an AV over IP solution for high definition signal transmission via category cables. This 4K solution leverages 10 Gb Ethernet switches and enables signal management of 4K@60 (4:4:4) signals with zero frame latency. USB HID class is also supported for KVM extension application. Additionally, via the NJR-P01UC, the NJR-CTB can be controlled using an IR cable (IR-P01-R) and recommended remote controller. The NJR-P01UC features LAN/RS-232C bidirectional communication.

The NJR-P01UC can be powered from PoE-supported 10 GbE switch over a Category cable; this feature eliminates the need for AC adapter.

Use this product with a combination of NJR-P01UC-T and NJR-P01UC-R or IP-NINJAR series products.

### ■ Specification

		NJR-P01UC-T	NJR-P01UC-R
Video/Audio input	HDMI	1 input HDMI/DVI 1.0 TMDS single link, HDCP 1.4/2.2 TMDS clock: Up to 300 MHz, TMDS data rate: Up to 18 Gbps Deep Color/HDR <sup>1</sup> 640x480@60 to 3840x2160@60 Reduced Blanking 480i, 576i to 3840x2160@24/25/30/50/59.94/60 (4:4:4), 3840x2160@50/59.94/60 (4:2:0), 4096x2160@24/25/30/50/59.94/60 (4:4:4), 4096x2160@50/59.94/60 (4:2:0) Color depth: 24/30/36 bits *For all supported video signals, see the table below. LPCM: Up to 8 channels Sampling frequency: 32/44.1/48/88.2/96/176.4/192 kHz Reference level: -20 dBFS, Max. input level: 0 dBFS Connector: HDMI Type A (19-pin) Maximum distances <sup>2</sup> : 98 ft. (30 m) (1080p@60), 39 ft. (12 m) (4K@60)	—
	10GbE	—	1 input SDVoE, AES-128 Deep Color/HDR <sup>1</sup> *Supported video signals are the same as those of HDMI. RS-232C/LAN/USB Connector: RJ-45 Maximum distances <sup>2</sup> : 328 ft. (100 m) Cable: CAT6A (STP) *For PoE, 24 AWG or thicker cable is recommended.
Video/Audio output	HDMI	—	1 output HDMI/DVI 1.0 TMDS single link, HDCP 1.4/2.2 TMDS clock: Up to 300 MHz, TMDS data rate: Up to 18 Gbps Deep Color/HDR <sup>1</sup> 640x480@60 to 3840x2160@60 Reduced Blanking 480i, 576i to 3840x2160@24/25/30/50/59.94/60 (4:4:4), 3840x2160@50/59.94/60 (4:2:0), 4096x2160@24/25/30/50/59.94/60 (4:4:4), 4096x2160@50/59.94/60 (4:2:0) Color depth: 24/30/36 bits *For all supported video signals, see the table below. LPCM: Up to 8 channels Sampling frequency: 32/44.1/48/88.2/96/176.4/192 kHz Reference level: -20 dBFS, Max. output level: 0 dBFS Connector: HDMI Type A (19-pin) Maximum distances <sup>2</sup> : 98 ft. (30 m) (1080p@60), 39 ft. (12 m) (4K@60)
	10GbE	1 output	— SDVoE, AES-128 Deep Color/HDR <sup>1</sup> *Supported video signals are the same as those of HDMI. RS-232C/LAN/USB Connector: RJ-45 Maximum distances <sup>2</sup> : 328 ft. (100 m) Cable: CAT6A (STP) *For PoE, 24 AWG or thicker cable is recommended.
Control I/F	RS-232C	1 port/Connector: Captive screw (3-pin)	
	LAN	1 port/10Base-T/100Base-TX/1000Base-T (Auto Negotiation), Auto MDI/MDI-X, Connector: RJ-45	
	USB	1 port/HID class, Connector: Female Type-B	2 ports/HID class, Connector: Female Type-A
	IR input	1 port/Connector: Captive screw (3-pin)	
Functions	EDID emulation, Connection Reset <sup>3</sup>		
General	Power	PoE, Connector: RJ-45 (10GbE input)	
		DC 12 V 0.8 A	DC 12 V 1.1 A
	Power consumption	AC adapter: AC 100 V - 240 V ±10%, 50 Hz/60 Hz ±3 Hz, DC 12 V 3 A 36.0 W	
		PoE: 11 W	PoE: 13 W
	Dimensions	DC 12 V: 11 W	DC 12 V: 13 W
	Weight	4.2 (W) × 1.1 (H) × 7.9 (D)" (106 (W) × 28 (H) × 200 (D) mm) (Excluding connectors and the like)	
	Temperature	Operating: 32°F to 104°F (0°C to +40°C), Storage: -4°F to +176°F (-20°C to +80°C)	
Humidity	20% to 90% (Non Condensing)		

<sup>1</sup> x.v.Color/3D/ARC/HEC/CEC are not supported.


<sup>2</sup> The maximum specified distances may not be achievable with some device combinations, cabling method, or other manufacturer's cable. For the same reasons, video signal disturbances or interruptions may occur, even if signals are within the specified distance (cable length) parameters. The maximum cable length varies depending on the connected devices. The specifications have been qualified under following conditions:

- HDMI (1080p@60) : When IDK's 24 AWG cable was used and signal of 1080p@60 24 bits was transmitted.
- HDMI (4K@60) : When IDK's 18 Gbps supported cable was used and signal of 3840x2160@60 24 bits was transmitted.
- 10GbE : When CAT6A (STP) cable is used.


<sup>3</sup> For digital systems, some problems, such as an HDCP authentication error, can often be recovered by physically disconnecting and reconnecting the digital cables. However, the Connection Reset feature will correct these problems automatically without the need to physically plug and unplug the cables. It creates the same condition as if the cable were physically disconnected and reconnected. This feature only works for the NJR-P's output. Connecting other devices between the NJR-P's outputs and sink devices, may interfere with the operation of this feature.

■ Front & Rear Panels

NJR-P01UC-T

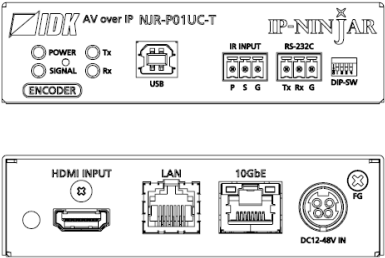

NJR-P01UC-R

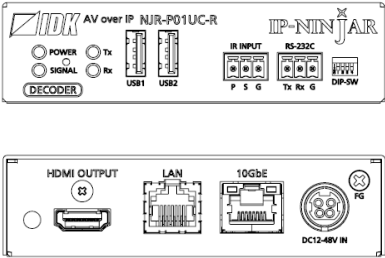

●All specifications and drawings are subject to change without notice. ●HDBase™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●SDVoE™ and SDVoE logo are trademarks of SDVoE Alliance. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified. ●©2020 IDK Corporation, all rights reserved.

## NJR-P01UC-T/NJR-P01UC-R supported video signals

Signal	Resolution	Frame Rate [Hz]	Pixel Clock [MHz]	Color Depth [bits]	INPUT	OUTPUT
					HDMI 10GbE	HDMI 10GbE
640x480@60	640x480	59.94	25.18	24/30/36	○	○
800x600@60	800x600	60.32	40.00	24/30/36	○	○
1024x768@60	1024x768	60.00	65.00	24/30/36	○	○
1280x768@60	1280x768	59.87	79.50	24/30/36	○	○
1280x800@60	1280x800	59.81	83.50	24/30/36	○	○
1280x960@60	1280x960	60.00	108.00	24/30/36	○	○
1280x1024@60	1280x1024	60.02	108.00	24/30/36	○	○
1360x768@60	1360x768	60.02	85.50	24/30/36	○	○
1366x768@60	1366x768	59.79	85.50	24/30/36	○	○
1400x1050@60	1400x1050	59.98	121.75	24/30/36	○	○
1440x900@60	1440x900	59.89	106.50	24/30/36	○	○
1600x900@60	1600x900	59.95	118.25	24/30/36	○	○
1600x1200@60	1600x1200	60.00	162.00	24/30/36	○	○
1680x1050@60	1680x1050	59.95	146.25	24/30/36	○	○
1920x1080@60 RB	1920x1080	59.93	138.50	24/30/36	○	○
1920x1200@60 RB	1920x1200	59.95	154.00	24/30/36	○	○
2048x1152@60 RB	2048x1152	60.00	162.00	24/30/36	○	○
2560x1440@60 RB	2560x1440	59.95	241.50	24/30/36	○	○
2560x1600@60 RB	2560x1600	59.97	268.50	24/30/36	○	○
3840x2160@60 RB	3840x2160	60.00	522.61	24/30/36*	○	○
480i	720x480	59.94	27.00	24/30/36	○	○
480p	720x480	59.94	27.00	24/30/36	○	○
576i	720x576	50.00	27.00	24/30/36	○	○
576p	720x576	50.00	27.00	24/30/36	○	○
720p@50	1280x720	50.00	74.25	24/30/36	○	○
720p@59.94	1280x720	59.94	74.18	24/30/36	○	○
720p@60	1280x720	60.00	74.25	24/30/36	○	○
1080i@50	1920x1080	25.00	74.25	24/30/36	○	○
1080i@59.94	1920x1080	29.97	74.18	24/30/36	○	○
1080i@60	1920x1080	30.00	74.25	24/30/36	○	○
1080p@50	1920x1080	50.00	148.50	24/30/36	○	○
1080p@59.94	1920x1080	59.94	148.35	24/30/36	○	○
1080p@60	1920x1080	60.00	148.50	24/30/36	○	○
3840x2160@23.98	3840x2160	23.98	296.70	24/30/36	○	○
3840x2160@24	3840x2160	24.00	297.00	24/30/36	○	○
3840x2160@25	3840x2160	25.00	297.00	24/30/36	○	○
3840x2160@29.97	3840x2160	29.97	296.70	24/30/36	○	○
3840x2160@30	3840x2160	30.00	297.00	24/30/36	○	○
3840x2160@50	3840x2160	50.00	594.00	24/30/36*	○	○
3840x2160@59.94	3840x2160	59.94	593.41	24/30/36*	○	○
3840x2160@60	3840x2160	60.00	594.00	24/30/36*	○	○
4096x2160@23.98	4096x2160	23.98	296.70	24/30/36	○	○
4096x2160@24	4096x2160	24.00	297.00	24/30/36	○	○
4096x2160@25	4096x2160	25.00	297.00	24/30/36	○	○
4096x2160@29.97	4096x2160	29.97	296.70	24/30/36	○	○
4096x2160@30	4096x2160	30.00	297.00	24/30/36	○	○
4096x2160@50	4096x2160	50.00	594.00	24/30/36*	○	○
4096x2160@59.94	4096x2160	59.94	593.41	24/30/36*	○	○
4096x2160@60	4096x2160	60.00	594.00	24/30/36*	○	○

RB: Reduced Blanking

\*For RGB/YCbCr 4:4:4, only 24 bit is supported.

For best results, please confirm that the source device(s) video output can be configured to match the listed formats above. For questions regarding other input video signals, please contact your IDK representative.